




PIPE BENDING SYSTEMS | simply smart.

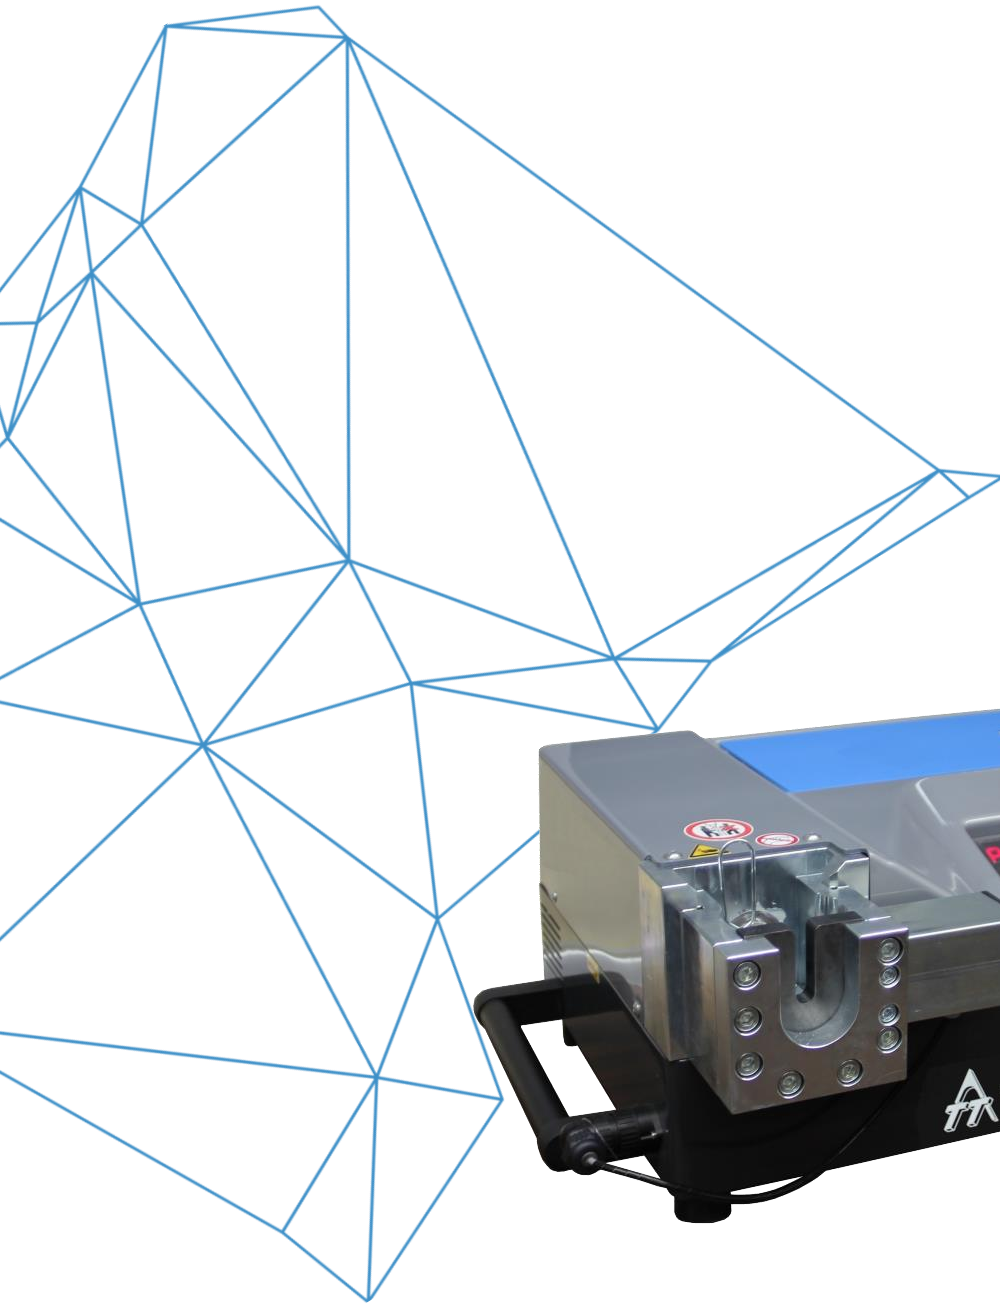


TUBOFORM C

CUTTING RING ASSEMBLY AND
FLARING MACHINE

BASIC EQUIPMENT / FEATURES

- Compact and rugged table-top machine for mobile and flexible use
- Universally applicable for both, cutting ring assembly and flaring
- Electronic pressure adjustment, manually or automatically (for use with tool recognition system)
- Short assembly times of only a few seconds
- Short set-up times for tooling when changing the pipe diameter or the working method
- Adjustable back stroke of the working cylinder for assembly time optimization
- Batch-size counter and total piece counter

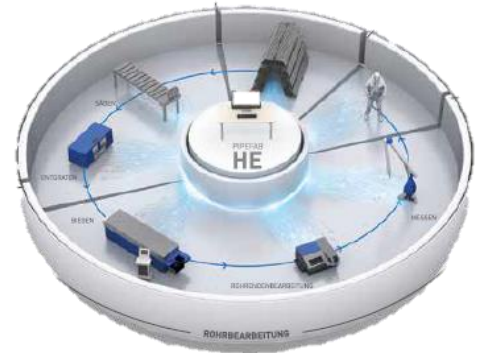

ADDITIONAL EQUIPMENT / ACCESSORIES

- Attachment for cutting ring assembly with manual pressure adjustment
- Attachment for cutting ring assembly with automatic tool recognition system and pressure adjustment
- Attachment for 37° flaring (SAE)
- Attachment for 10° flaring (BV-10, ZAKO)

TECHNICAL DATA

	TUBOFROM C	System ZAKO
Pipe diameter range	Ø 6 – 42 mm	Ø 6 – 38 mm
Maximum feed / forming force	173 kN	173 kN
Maximum stroke of the working cylinder	44 mm	44 mm
Tool speed (switchable)	6,9 mm/s	6,9 mm/s
Dimensions, approx. (BxHxT)	660 x 265 x 515 mm	660 x 265 x 515 mm
Weight, approx.	66 kg	66 kg
Connected load	1,2 kW	1,2 kW

Photos, text and illustrations are subject to change.
© PIPE BENDING SYSTEMS GmbH & Co.KG. 2021.